

LED Light Fixture



IP65

Spektr-A-Ex series



Spektr-30A-Ex



Spektr-50A-Ex



Spektr-70A-Ex



Spektr-100A-Ex



Indoor areas with potentially explosive atmosphere of gas, dust and vapor in accordance with State Standards IEC 60079-0-2011, IEC 60079-15-2010, IEC 61241-1-2-2011.


Basic parameters of LED light fixture

Product name	Light flux, lm	Power consumption, W	Explosion-proof construction	IP degree	Overall dimensions (AxBxC), mm	Weight, kg
Spektr-30A-Ex (SSO-A-220-003-01-N/W-MCC1-Ex)	3250	26	Ex nR II T4 Gc / DIP A21 TA(110...135)°C	IP65	310x180x107	3,0
Spektr-50A-Ex (SSO-A-220-004-01-N/W-MCC1-Ex)	7750	62			635x180x107	5,5
Spektr-70A-Ex (SSO-A-220-010-01-N/W-MCC1-Ex)	11250	90			715x180x107	6,0
Spektr-100A-Ex (SSO-A-220-005-01-N/W-MCC1-Ex)	15650	125			1228x180x107	10,0


General parameters of LED light fixture

AC supply voltage, V	from 140 to 265
Nominal frequency, Hz	50±10%
DC supply voltage, V	from 200 to 370
Operating temperature range, °C	from - 40 to + 60
Emission color	white
Color temperature of emission, K	W - 3000÷4000/N - 4000÷6000
Electric shock protection class in accordance with IEC 60598-1, part 8	I
Climatic performance in accordance with State Standard 15150	MCC1
Warranty, years	5
Durability, hours	100000


Light Distribution Curve




A - cosine
Spektr-30A-Ex



A - cosine
Spektr-50A-Ex




A - cosine
Spektr-70A-Ex



A - cosine
Spektr-100A-Ex

Overall dimensions of LED light fixture

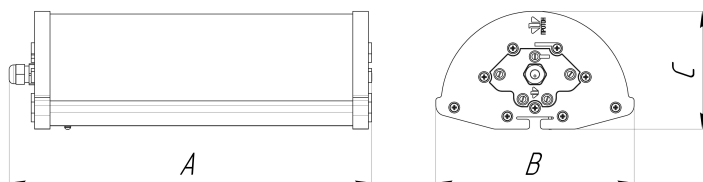

Installation type of LED light fixture

