


## Symbolic notation structure of LED Beacon

LED Beacon X - X - X - X

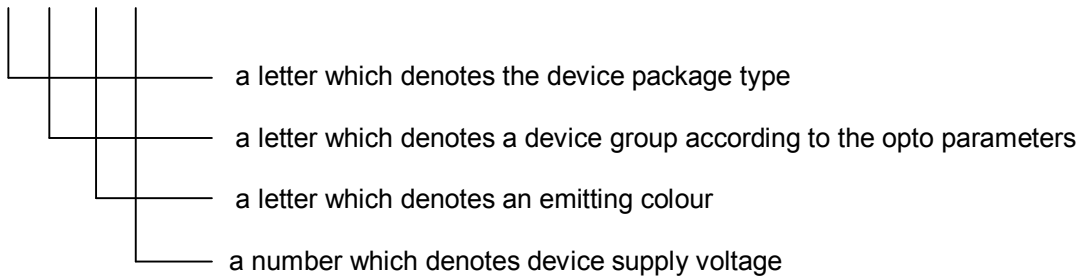

Denotation of a group according to luminous intensity	Angle limit in the vertical surface at a round up angle of 360 degrees	luminous intensity not less, cd	Emitting colour	Supply voltage, V		Power consumption not more, W	
				R	W	R	W
A1	from - 6 to + 90	10	R-red  W-white	DC 48	7	-	
				AC 220	9		
A2	from - 6 to + 6 from + 10 to + 50	4		AC/DC 12	3	-	
				AC/DC 24	3		
	from + 6 до + 10	10		DC 48	4	6	
				AC 220	9		
B	from - 6 to + 6 from + 10 to + 50	4		AC/DC 12	6	-	
				AC/DC 24	6		
				DC 48	6	10	
	from + 6 to + 10	20		AC 110	5	-	
			AC 220	9			
C	from - 6 to + 6 from + 10 to + 50	4	AC/DC 12	9	-		
			AC/DC 24	9			
	from + 6 до + 10	32	DC 48	9	12		
			AC 220	9	20		

**Примечание:** power supply tolerance of reference value makes  $U_n=12B, 24V, 110B, 220V^{+10\%}$  -15%,  $U_n=48V^{+25\%}$  -15%.