

LED Light Fixture

IP65

Luch series



Outdoor illumination



- Landscape,
- building facades.



Basic parameters of LED light fixture

Product name	Luch angle, degree	Light flux, lm	Power consumption, W	IP degree	Dimensions, mm	Weight, kg
Luch-48 (SPSR-D-220-017-N-MCC1)	130x68	6200	60	IP65	340x209x245	5,5
Luch-75 (SPSR-C-220-015-N-MCC1)	25x25	9300	90		462x350x140	8,0
Luch-50 (SPSR-C-220-012-N-MCC1)	25x25	10000	96		580x350x105	8,3
Luch-24 (SPSR-C-220-016-N-MCC1)	25x25	8500	100		340x209x245	5,2

General parameters of LED light fixture


AC supply voltage, V	from 140 to 265
Frequency, Hz	50 ± 10%
DC supply voltage, V	from 200 to 370
Operating temperature range, °C	from - 40 to + 60
Emission color	white
Color temperature of emission, K	N - 4000÷6000
Climatic performance in accordance with State Standard 15150	MCC1
Warranty, years	5
Durability, years	10

Light Distribution Curve

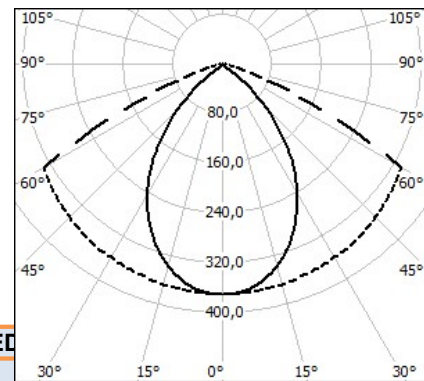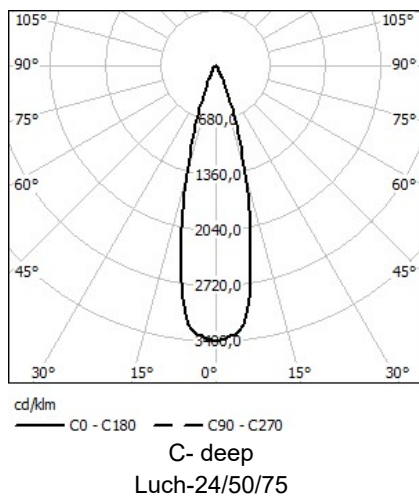


Overall and mounting dimensions of LED

Luch-24/48

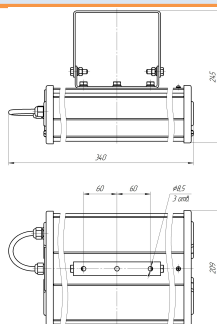

cd/km
 — C0 - C180 — C90 - C270

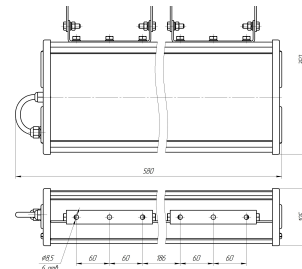

Luch-75

