


LED Light Fixture

IP65

Prospekt series

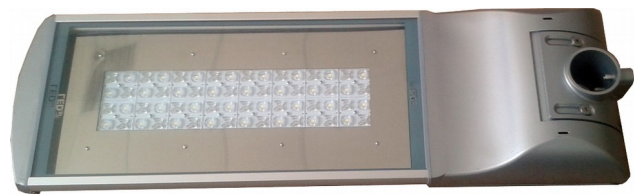

Outdoor illumination



- Highways,
- streets,
- roads.

Basic parameters of LED light fixture

Product name	Light flux, lm	Power consumption, W	IP degree	Overall dimensions (AxBxC), mm	Weight, kg
Prospekt-2 (SKSR-B-220-012-N-MCC1)	23 000	185	IP65	780x285x170	10,0
Prospekt-2R (SKSR-B-220-015-N-MCC1)	22500	180		780x285x170	11,2
Prospekt-2D (SKSR-B-220-016-N-MCC1)	22500	180		780x285x170	11,2
Prospekt-1 (SKSR-A/B-220-011-N-MCC1)	26 500	240		910x285x170	12,0
Prospekt-3 (SKSR-A/B-220-014-N-MCC1)	31 500	300		910x285x170	14,3


Prospekt-2R has an ability to adjust light flux value from 0% to 100% by wireless radio channel.

Prospekt-2D has an ability to adjust light flux value from 10% to 100% by external control voltage from 0V to 10V.

General parameters of LED light fixture


AC supply voltage, V	from 140 to 265
Frequency, Hz	50 ± 10%
DC supply voltage, V	from 200 to 370
Operating temperature range, °C	from - 63 to + 60
Emission color	white
Color temperature of emission, K	N - 4000÷6000
Climatic performance in accordance with State Standard 15150	MCC1
Warranty, years	5
Durability, years	10

Light Distribution Curve

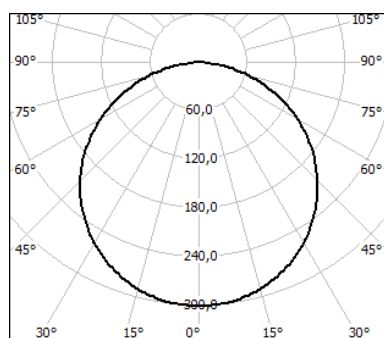

cd/klm
 — C0 - C180 - - C90 - C270


A - cosine

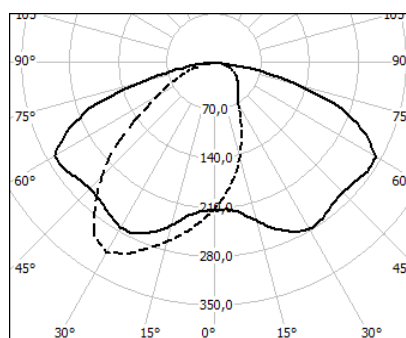

cd/klm
 — C0 - C180 - - C90 - C270

B - wide

Overall dimensions of LED light fixture

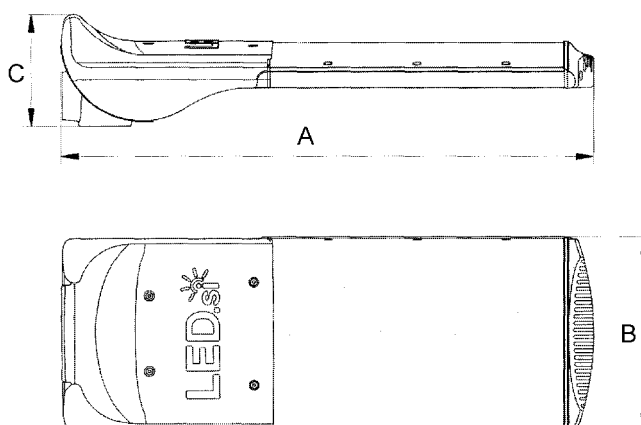

JSC «Proton», 302040, Orel city, Leskova str., 19, tel./fax: (4862) 41-44-03
www.proton-orel.ru

