

# LED Light Fixture

IP65

# Spektr series



Outdoor illumination



- Streets and roads,
- side-walks,
- railway platforms,
- crosswalks,
- parking lots,
- petrol stations.



## Basic parameters of LED light fixture

Product name	Light flux, lm	Power consumption, W	IP degree	Overall dimensions, mm	Weight, kg
Spektr-30 (SSOR-A-220-003-N/W-MCC1)	3250	26	IP65	310x180x107	3,0
Spektr-50 (SSOR-B-220-004-N/W-MCC1)	7440	62		635x180x107	5,5
Spektr-70 (SSOR-A-220-010-N/W-MCC1)	11250	90		715x180x107	6,0
Spektr-100 (SSOR-B-220-005-N/W-MCC1)	15000	125		1228x180x107	10,0

## General parameters of LED light fixture


AC supply voltage, V	from 140 to 265
Frequency, Hz	50±10%
DC supply voltage, V	from 200 to 370
Operating temperature range, °C	from - 40 to + 60
Emission color	white
Color temperature of emission, K	W- 3000÷4000/N- 4000÷6000
Climatic performance in accordance with State Standard 15150	MCC1
Warranty, years	5
Durability, years	10

## Light Distribution Curve




A – cosine  
(Spektr-30)

B – wide  
(Spektr-50)




A – cosine  
(Spektr-70)



B – wide  
(Spektr-100)

### Overall dimensions of LED light fixture

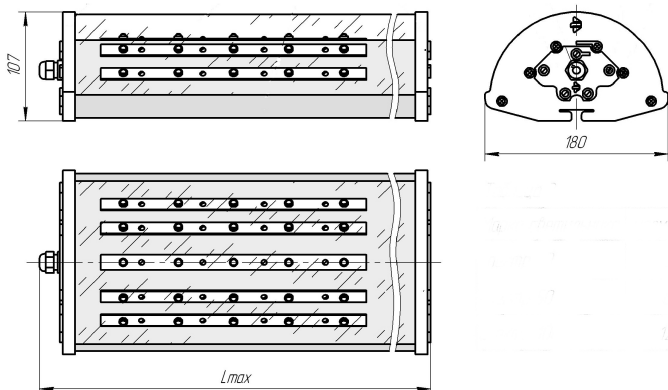

### Installation type of LED light fixture

