

Indoor illumination

LED Light Fixture

IP20

IP40

IP54

IP65

Entryway series



- Lift halls,
- staircase landings,
- halls,
- entrances to the buildings.

Basic parameters of LED light fixture


Product name	Light flux, lm	Power consumption, W	IP degree	AC/DC supply voltage, V	Overall dimensions (AxBxC), mm	Weight, kg
Entryway (SSOR-A-220-002-N/W-MCC1)	990	9	IP65	140 ÷ 265/200 ÷ 370	Ø197x100	1,5
Entryway-1 (SSOR-A-220-032-N/W-MCC1)	1400	13		140 ÷ 265/200 ÷ 370		
Entryway-8 (SSOR-A-220-020-N/W-MCC1)	990	9		140 ÷ 265/200 ÷ 370	Ø175x80	1,0
Entryway-8M (SSOR-A-220-036-N/W-MCC1)	990	9		140 ÷ 265/200 ÷ 370		
Entryway-8M-1 (SSOR-A-220-047-N/W-MCC1)	990	9	IP54	140 ÷ 265/200 ÷ 370	347x80x58	0,55
Entryway-8M-1-36 (SSOR-A-036-047-N/W-MCC1)	990	9		32 ÷ 40/45 ÷ 56		
Entryway-10 (SSOR-A-220-021-N/W-U2)	900	9		140 ÷ 265/200 ÷ 370	315x72x68	0,4
Entryway-11 (SSOR-A-220-022-N/W-U2)	990	9		140 ÷ 265/200 ÷ 370	Ø228x100	1,5
Entryway-16 (SSOR-A-220-027-N/W-U3.1)	1200	12	IP20	140 ÷ 265/200 ÷ 370	Ø310x90	1,1
Entryway-17 (SSOR-A-220-028-N/W-MCC2)	990	9	IP54	140 ÷ 265/200 ÷ 370	258x117x110	0,55
Entryway-17-36 (SSOR-A-36-028-N/W-MCC2)	1650	17		32 ÷ 40/45 ÷ 56		
Entryway-18 (SSOR-A-220-049-P-N/W-MCC)	1650	15	IP40	140 ÷ 265/200 ÷ 370	250x250x40	1,2

Entryway-16 has internal presence sensor.


General parameters of LED light fixture

AC Supply voltage, V	from 140 to 265/ from 32 to 40
Frequency, Hz	50 ± 10%
DC supply voltage, V	from 200 to 370/ from 45 to 56
Operating temperature range, °C	from - 40 to + 60
Emission color	white
Color temperature of emission, K	W - 3000÷4000/ N - 4000÷6000
Climatic performance in accordance with State Standard 15150	U2/U3.1/MCC/MCC2
Warranty, years	5
Durability, years	10


Light Distribution Curve

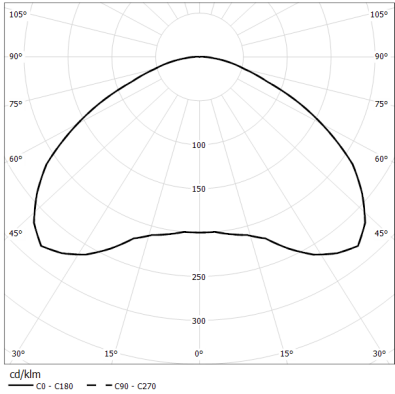


A - cosine
Entryway, Entryway-1

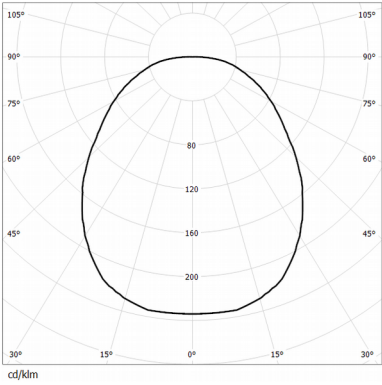

A - cosine
Entryway-8, 8M, 8M-1, 8M-1-36, 16, 18




A - cosine
Entryway-10

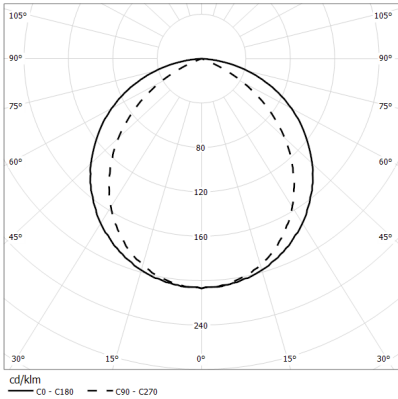


A - cosine
Entryway-17, 17-36

Dimensions of LED light fixture


Entryway, Entryway-1

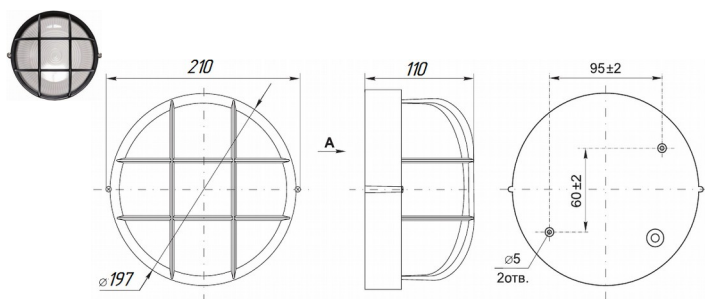


Entryway-8, Entryway-8M

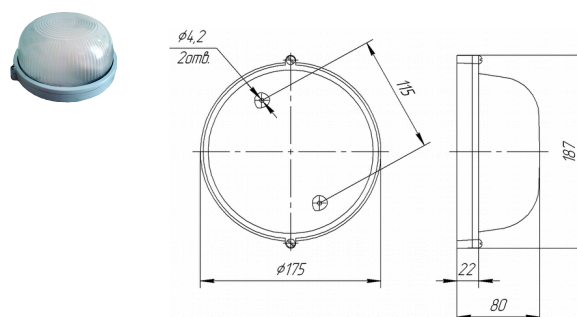


Entryway-8M-1, Entryway-8M-1-36

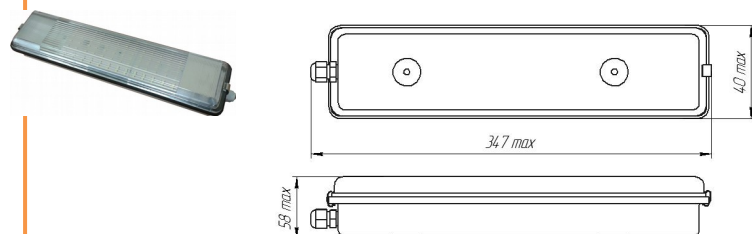


Entryway-10

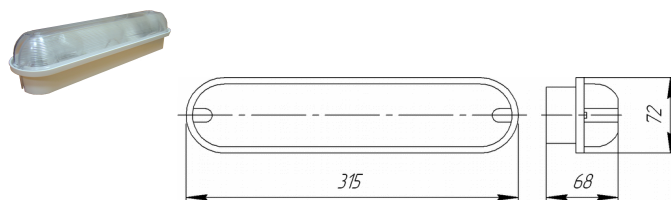


Entryway-11

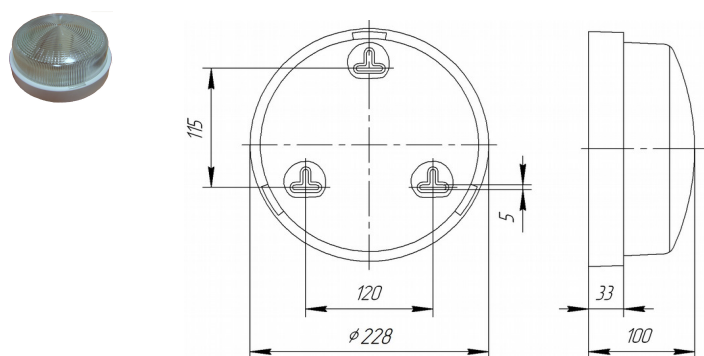

Entryway-16

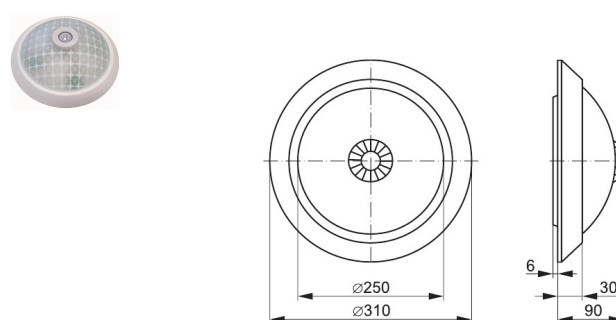

Entryway-17, Entryway-17-36

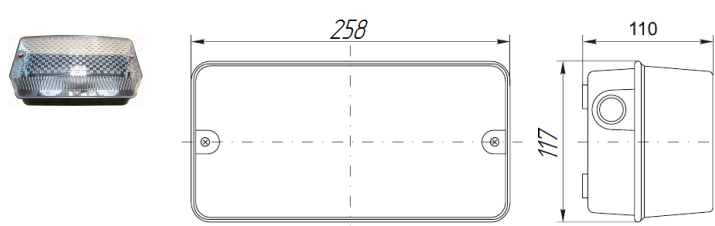

Entryway-18

