

# LED Light Fixture

IP42

## Hall series



Indoor illumination



- Warehouses,
- rooms,
- halls,
- offices,
- underground walkways,
- entrances to the buildings.


## Basic parameters of LED light fixture

Product name	Light flux, lm	Power consumption, W	IP degree	Overall dimensions, mm	Weight, kg
Hall-16-36 (SSOR-A-36-007-N/W-MCC4)	1800	16	IP42	385x156x70	2,5
Hall-20-220 (SSOR-A-220-007-N/W-MCC4)	2300	20			


## General parameters of LED light fixture

Hall-16-36/20-220 AC supply voltage, V	from 32 to 40/from 140 to 265
Frequency, Hz	50 ± 10%
Hall-16-36/20-220 DC supply voltage, V	from 45 to 56/from 200 to 370
Operating temperature range, °C	from - 40 to + 60
Emission color	white
Color temperature of emission, K	W- 3000÷4000/N - 4000÷6000
Climatic performance in accordance with State Standard 15150	MCC4
Warranty, years	5
Durability, years	10

## Light Distribution Curve



А - cosine

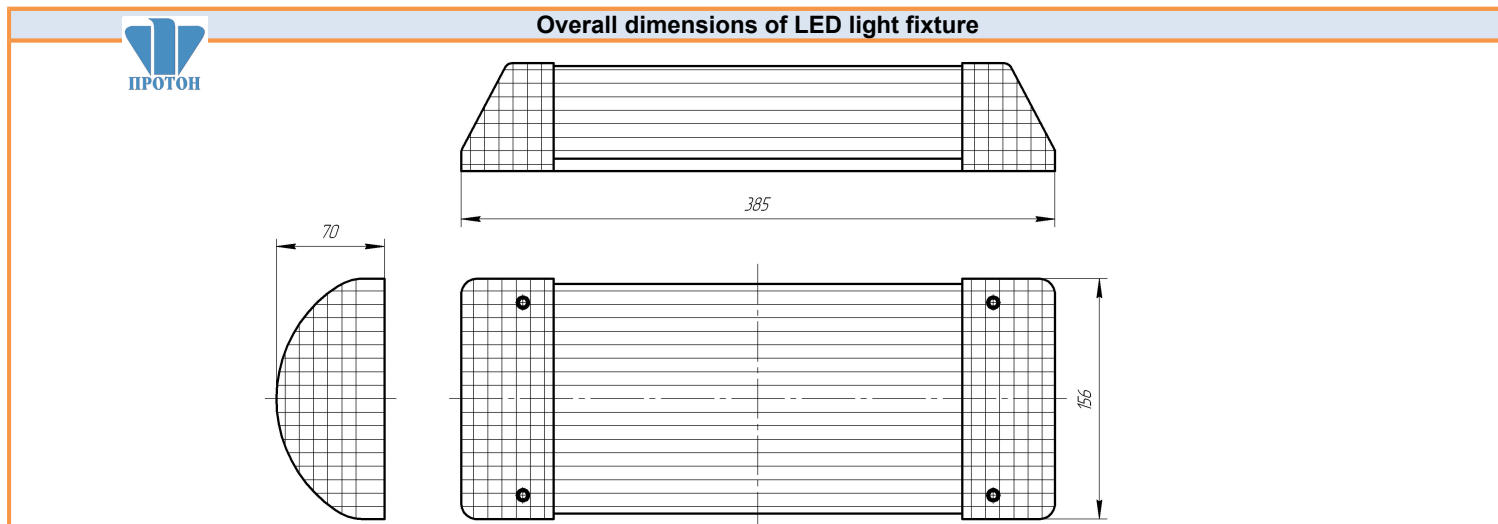

JSC «Proton», 302040, Orel city, Leskova str., 19, tel./fax: (4862) 41-44-03  
[www.proton-orel.ru](http://www.proton-orel.ru)