


Symbolic notation structure of LED Beacon PPD

ZOM PPD X - X - X

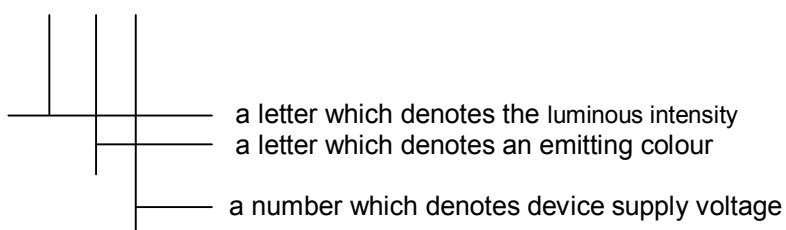

Denotation of a group according to luminous intensity	Angle limit in the vertical surface at a round up angle of 360 degrees	luminous intensity not less, cd	Emission colour	Supply voltage, V	Power consumption not more, W	
					R	W
A1	from - 6 to + 90	10	R-red W-white	DC 48	7	-
				AC 220	9	
A	from – 6 to + 6 from + 10 to + 50	4		AC/DC 12	3	-
				AC/DC 24	3	
	from + 6 to + 10	10		DC 48	4	6
				AC 220	9	
Б	from – 6 to + 6 from + 10 to + 50	4		AC/DC 12	6	-
				AC/DC 24	6	
	from + 6 to + 10	20		DC 48	6	10
				AC 110	5	-
В	from - 6 to + 6 from + 10 to + 50	4		AC 220	9	
				AC/DC 12	9	-
	from + 6 to + 10	32		AC/DC 24	9	
				DC 48	9	12
				AC 220	9	20

Note: power supply tolerance of reference value makes Up=12V, 24V, 110V, 220V ^{+10%} _{-15%},
 Up=48V ^{+25%} _{-15%}.